


Q-TILE C CONDUCTIVE PVC FLOOR TILES

STANDARD COLORS:

WHITE
BLUE
LIGHT GREY
DARK GREY

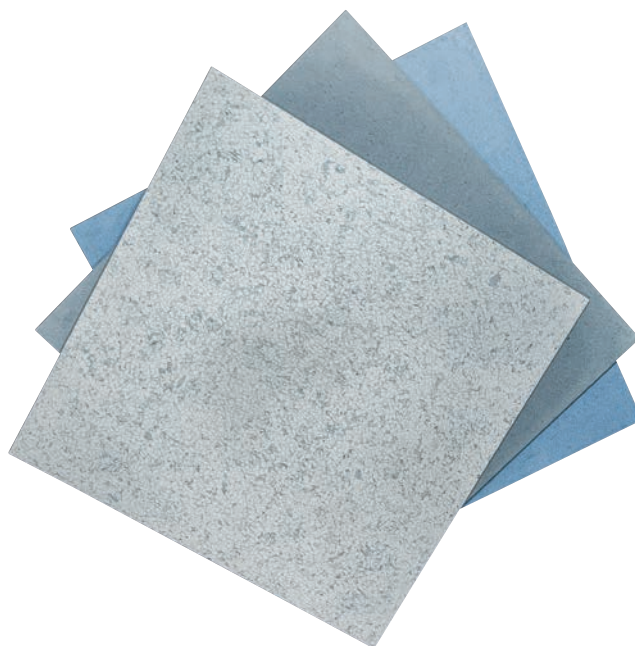

Classification EN 685	Class 34 + 43
Thickness EN 428	3,0 mm
Size of tiles EN 427	61 x 61 cm
Total Weight EN 430	5,8 kg/m ²
Dimensional stability EN 434	lengthwise / crosswise 0.10%
Residual indentation EN 433	0,04 mm
Abrasion resistance EN 660-2	< 2 mm ³
Effect to castor chair EN 425	No influence
Thermal conductivity EN 12524	0,28 W/(m.K)
Light fastness EN20 105-B02	≥ 6
Resistance to chemicals EN 423 DIN 51958	Excellent Offers excellent resistance
Formaldehyde emission EN 717-1	Class E1 ≈ 0,005 mg./m ³
VOC emissions AgBB/DIBT	Suitable for indoor applications
Warranty	10 years

ELECTRICAL PROPERTIES

Electrical resistance IEC61340-4-1 EOS/ESD S7.1	2,5x10 ⁴ ≤ R _{gp} ≤ 10 ⁶ Ω 1x10 ⁴ ≤ R ≤ 10 ⁵ Ω
--	--

Body voltage IEC61340-4-5 ESD STM97.2	< 10V < 10V
--	----------------

Q-TILE C - meets the requirements of EN 14041

Fire resistance EN 13501-1	Bfl - s1
--------------------------------------	----------

Slip resistance EN 13893	Class DS - μ ≈ 0.40
------------------------------------	---------------------

Static electrical propensity EN 1815	< 2 kV
--	--------

Electrical resistance EN 1018	< 1 x 10 ⁶ Ω
---	-------------------------



EN 14041

The above informations are subject to modifications for the benefits of further improvements